

# S548C


# 5U Supports 48-bay SAS3, SATA3 JBOD



## **Key Features**

- Support SAS 3.0 12Gb/s, SATA 3.0 6Gb/s interface or backward compatibility.
- Support 4 pcs SFF-8643 internal MH2 mini-SAS HD interface connector for HBA card.
- Built-in front access USB3.0 port
- SATISFICATION- Whenever you have any queries of products, we'll dive right in and find out the root cause and feedback the best solution.

#### Connection Diagram

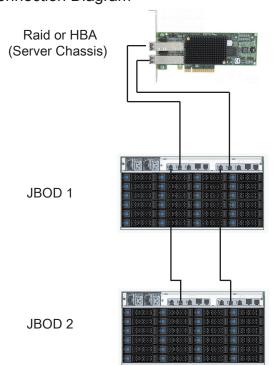

## Specifications

M/B	JBOD
Drive Bays	48x3.5" hot-swap
	Optional(NA)
Front Control	Power ON/OFF,UID,USB3.0
	Power Status, HDD Ststus, Fan
Indicators	Status,Lan Activity
Cooling Fans	80x38 7 pcs 80x25 2pcs
HDD Backplane	SAS3.0 SATA3.0 x48 Mini SAS
	HDx12(SFF-8643)
External SAS Port	6 x SFF-8644
PSU Form Factor	1U Redundant 80Plus
	1U Single PSU Meet CE Rohs
Material	AL6061, 1.2mm SGCC, ABS-PC
Net Weight	24. kg
Gross Weight	27.8kg
Dimensions(DxWxH)	650x431x221(mm)

#### **TOP VIEW**



Motherboards, hard drives, cables are NOT included in chassis.

#### FRONT VIEW



**REAR VIEW** 

