

S648A

6U Supports 48 SAS3,SATA3 3.5",2.5"HDD cage 12Gb/s Mini-SAS HD backplane



Specifications


| | |
|-------------------|---|
| M/B | 12"x13" E-ATX, SSI |
| Drive Bays | 48x3.5" hot-swap Optional(Internal 2.5"x2) |
| Front Control | Power ON/OFF,UID,USB3.0 Power Status, HDD Ststus,Fan |
| Indicators | Status,Lan Activity |
| Cooling Fans | 80x38 (mm) 7 pcs |
| HDD Backplane | SAS3.0 SATA3.0 x60 Mini SAS HDx15(SFF-8643) |
| Expansion Slots | 7x Low Profile |
| PSU Form Factor | 2U Redundant 80Plus 1600W Meet CE Rohs |
| Material | AL6061, 1.2mm SGCC, ABS-PC |
| Net Weight | 24.5 kg |
| Gross Weight | 29.5 kg |
| Dimensions(DxWxH) | 650x431x265(mm) |

Key Features



- ◆ Support SAS 3.0 12Gb/s, SATA 3.0 6Gb/s interface or backward compatibility.
- ◆ Support 4 pcs SFF-8643 internal MH2 mini-SAS HD interface connector for HBA card.
- ◆ Built-in front access USB3.0 port
- ◆ SATISFICATION- Whenever you have any queries of products, we'll dive right in and find out the root cause and feedback the best solution.

TOP VIEW

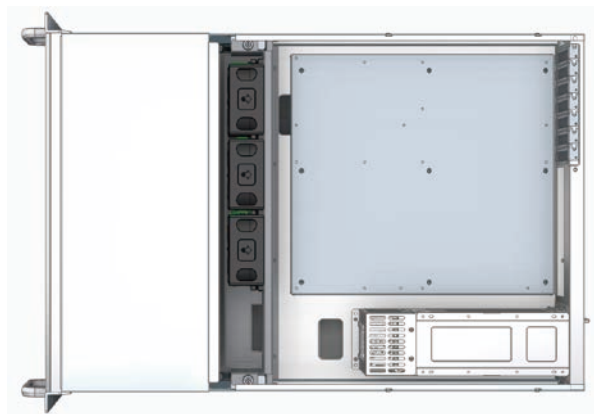

- ❖ Motherboards, hard drives, cables and expansion cards are NOT included in chassis.

FRONT VIEW



REAR VIEW

