

S648C

6U Supports 48-bay SAS3,SATA3 JBOD




Key Features

- ◆ Support SAS 3.0 12Gb/s, SATA 3.0 6Gb/s interface or backward compatibility.
- ◆ Support 4 pcs SFF-8643 internal MH2 mini-SAS HD interface connector for HBA card.
- ◆ Built-in front access USB3.0 port
- ◆ SATISFICATION- Whenever you have any queries of products, we'll dive right in and find out the root cause and feedback the best solution.

Connection Diagram


Raid or HBA
(Server Chassis)

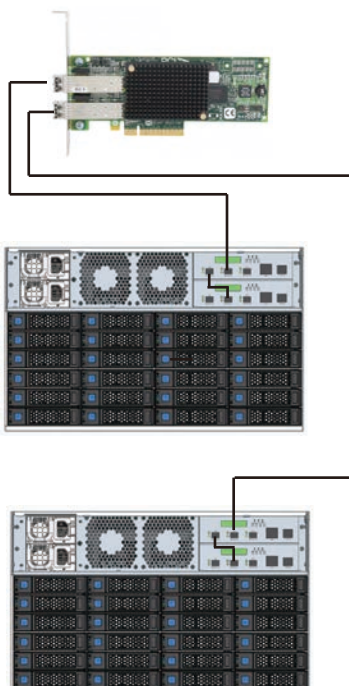

Specifications

M/B	JBOD
Drive Bays	48x3.5" hot-swap Optional(Internal 2.5"x2)
Front Control	Power ON/OFF,UID,USB3.0 Power Status, HDD Ststus,Fan
Indicators	Status,Lan Activity
Cooling Fans	80x38 7 pcs 80x25 2pcs
HDD Backplane	SAS3.0 SATA3.0 x48 Mini SAS HDx12(SFF-8643)
External SAS Port	6 x SFF-8644
PSU Form Factor	PS2, PS2 Redundant 80Plus CRPS 2U 800W Meet CE Rohs
Material	AL6061, 1.0mm SGCC, ABS-PC
Net Weight	24.5 kg
Gross Weight	28.1kg
Dimensions(DxWxH)	650x431x176(mm)

TOP VIEW

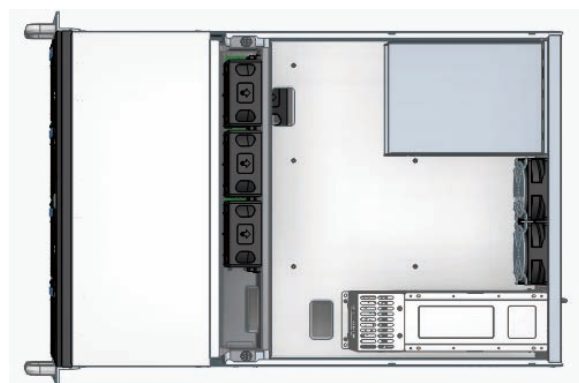

❖ Motherboards, hard drives, cables are NOT included in chassis.

FRONT VIEW



REAR VIEW

